


# THREAD REMOVAL TOOL

The Thread Removal Tool is used for the in-situ removal of valve stem threads. This permits the installation of the TTS Quick Stem Sensor (QSS) on a smooth stem area for direct, accurate measurement of stem torque and thrust. A procedure for use of the thread removal tool is supplied with each system.

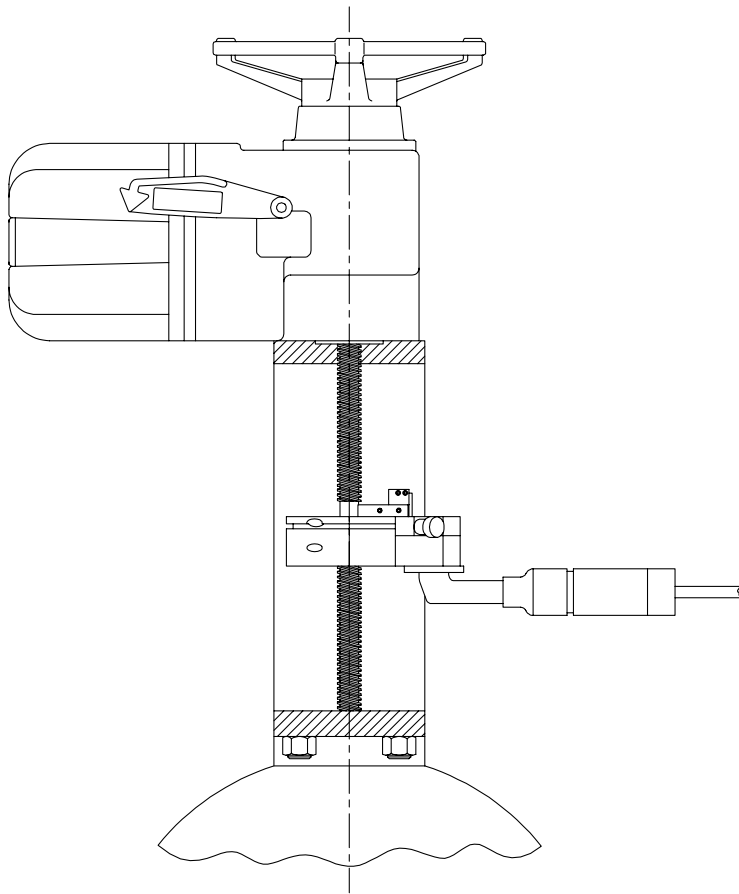

Several features of this versatile tool include:

- ***Lightweight and portable design***
- ***Low clearance, split frame system***
- ***Requires less than 1-1/2" radial clearance***
- ***Automatic centering and squaring***
- ***Leaves precision finish for QSS installation***
- ***Setup and complete cut in minutes (ALARA)***
- ***Pneumatic or electric drive available***